Super-fast standalone

network scanner that's

powerful and easy to

use



### **Dedicated network scanner**

The Canon imageFORMULA ScanFront 400 is the ultimate network scanner helping to streamline document workflows. The simple interface allows quick and easy scanning to email, network folders, FTP, USB memory, fax, or printers directly from the scanner's bright and responsive 10.1" (25.7 cm) TFT touchscreen – no additional hardware of software is required.

### **Ideal for every business**

Its desk-friendly size, elegant design and quiet operation make it well-suited for both back office use and customer-facing counter tops in retail, banking, healthcare and the legal profession. Small businesses can benefit from documents being quickly digitalised and saved to a central database. A network of ScanFront 400 scanners can be integrated into existing infrastructure of large corporations allowing for decentralised scanning.

### **ScanFront 400**

B&W SPEED 45 ppm

COLOUR SPEED 45 ppm

DAILY DUTY CYCLE 6,000 scans/day

> AUTOMATIC DOCUMENT FEEDER 60 sheets



## POWERFUL DEDICATED NETWORK SCANNER



### **Boost productivity**

Scan more documents with high-speed scanning at 45 pages per minute, plus a large 60-sheet ADF. Canon's tried and tested document feeding mechanism and durable build quality, rated for up to 6,000 scans per day, ensure unparalleled reliability. Ultra-sonic sensors instantly detect double feeds, while the Double Feed Release (DFR) function enables easy scanning of envelopes and folded documents.


### Wide range of media

Make light work of scanning all kinds of documents, from A4, A5, and business cards to long document rolls (up to 3 metres) and even plastic cards, passports and A3 documents (in folio mode) – ideal for HR departments, hotels and banks. The device automatically detects paper size and adjusts as required.

### **Customisation and integration**


The ScanFront 400's
Linux-based OS brings the
power and flexibility to
integrate with your document
workflow. Create and send
customised metadata
index files with every scan,
allowing for easy document
classification into back office
systems. System integrators
can use the web app Software
Development Kit to integrate
their own customisations or
design bespoke applications
for the scanner.



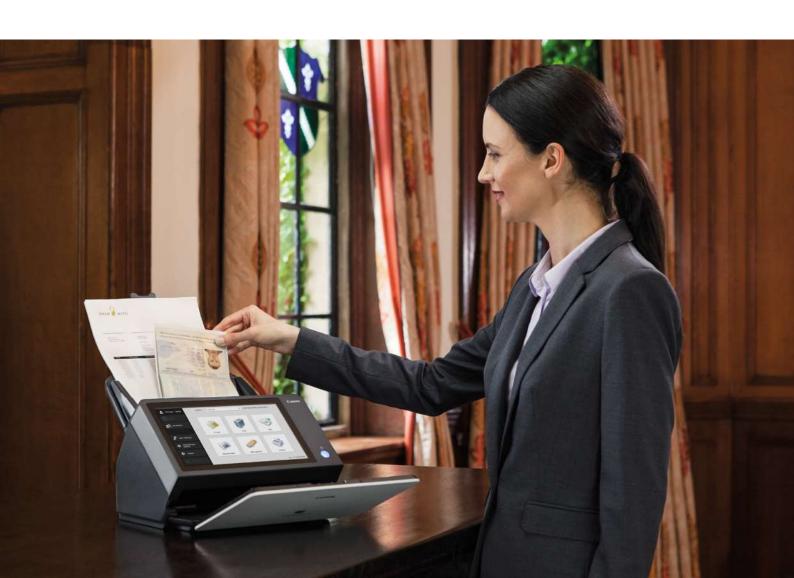

# ADVANCED SECURITY AND USER MANAGEMENT FEATURES


### **ScanFront Administration Tool**

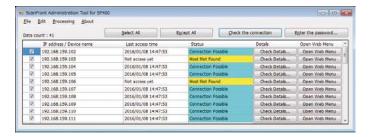

Administration tool software allows you to manage multiple ScanFront scanners at a time. You can check the current status of the ScanFront scanners on the network, configure settings, manage users, back-up and restore configuration data.

# Secure operation


Security comes as standard: options include password log in, auto logout and request for address confirmation before sending. Frequent scan settings and destinations can be

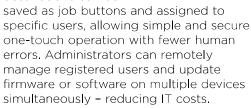

- Device security: only authorised users can access the device, using ID and password authentication, which can be controlled using your active directory login or LDAP directory. An automatic logout gives additional protection against access to the device by unauthorised users
- User security: user permissions can be set individually, ensuring that users can only access the appropriate or necessary scanning options and features
- Document security: scanned documents, such as confidential files, can be sent with PDF encryption and password protection, so you can control access for viewing, editing and printing. Additionally, no copy of the scanned documents are stored on the device.

# RAPID, RELIABLE SCANNING AND COMPACT DESIGN



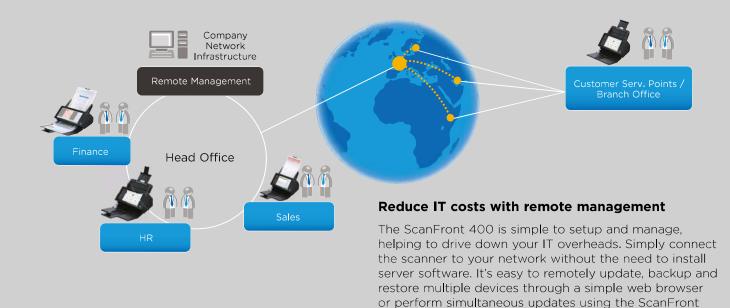

# ScanFront 400 Technical Specifications

ADF Network Document Scanner

LAN: 10Base-T / 100Base-TX / 1000Base-T (RJ-45

10.1" (TFT-LCD Touch Panel (WSGVA 1024 x 600)

100 x 100 dpi / 150 x 150 dpi / 200 x 200 dpi / 300 x 300 dpi / 400 x 400 dpi / 600 x 600 dpi

Black and White, Error Diffusion, Text Enhancement, 256-level Grayscale, 24-bit Colour, Auto Colour

Ultrasonic double feed detection. Double feed retry /

Skip Blank Page, Automatic document orientation. Background smoothing, Bleed-through reduction,

Remove shadow, Colour drop-out / enhancement

release, Deskew, Folio Mode, Long document scanning,

3x USB 2.0 (for USB Memory, Keyboard, Mouse, etc.)

CMOS CIS 1 Line Sensor (x2)

600 dpi RGBIED

connector)

Retard Roller

45 ppm / 90 ipm

45 ppm / 90 ipm

Detection

Approx. 6,000 scans/day

Simplex / Duplex

### GENERAL PRODUCT INFORMATION

Туре Scanning sensor unit **Optical Resolution Light Source** 

Scanning side

Interface

**Operation Panel** Paper separation Daily duty cycle

### SCANNING **SPECIFICATIONS**

Black and White Speed **Colour Speed** Scanning resolution

Scanning modes

Scanning features

File output

Card

Passport

**DOCUMENT** SPECIFICATIONS

Paper

Width: 50 - 216 mm

Length: 54 - 356 mm (3,048 mm in Long Document

Thickness (separation ON): 27 - 209 g/m² (0.04 - 0.25

Thickness (separation OFF): 27 - 255 g/m² (0.04 -

0.30 mm)

**Business card** Size: 50 x 85 mm Thickness: up to 380g/m2 (0.35 mm)

Size: 54 x 86 mm (ISO Standard)

TIFF, JPEG, PNG, PDF, PDF/A

Horizontal feeding only, max, 10 cards or 1 embossed

Use optional passport carrier sheet Thickness: up to 6 mm (including carrier sheet)

Feeder capacity 60 sheets (80 a/m<sup>2</sup>)

### **NETWORK FEATURES**

Admin Tool.

Scanning destinations

IP address Directory support

SOFTWARE

Protocols

Software Tools

PHYSICAL FEATURES Dimensions (WxDxH)

Weight

Power requirements Power consumption

Operating environment

**Environmental** compliance

**CONSUMABLES AND** ACCESSORIES

Consumables

Footnotes

Scan to Shared Folder

Scan to E-mail Scan to FTP

Scan to FAX (via Internet fax service) Scan to Printer (FTP printing)

Scan to USB Memory

TCP/IP (IPv4), DNS, DHCP, SMB, NTP, HTTP, FTP SFTP, Secure sending (FTPS and SMTPS), WebDAV,

Obtained automatically (DHCP supported) or fixed

Active Directory (NTLM authentication) OpenLDAP (simple authentication)

canFront Administration Tool Web Application Toolkit (SDK)[1]

Trays closed: 305 × 282 × 230 mm Trays opened: 305 × 629 × 366 mm

Approx. 4.5 kg AC100-240V (50/60Hz) Scanning: 40W or less Sleep Mode: 2.0W or less Power Turned Off: 0.5W or less

Temperature: 10 - 32.5°C Humidity: 20 - 80% RH RoHS and ENERGY STAR

Exchange Roller Kit (feed roller and retard roller), Carrier Sheet (Passport), Carrier Sheet (A4)



